

Heavy duty electric blower

750 m³/hour, particularly suitable for ventilation and suction in turbo compressed engine rooms.

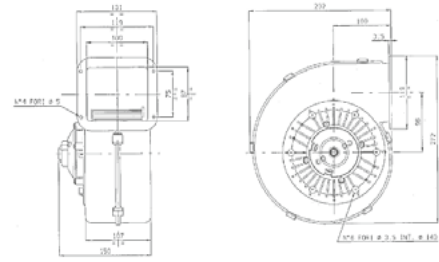
Article	Supply	Abs.	Model	Capacity mc/h	Weight kg
3334212D	12V	6A	right	750	2
3334212S			left		



Left



Right

**Air suction and ventilation hose**

resistant to temperature, built in PVC coated tissue, self extinguishing V(TM)-O, according to UL94 and grade M2 according to NFP92 503 with steel wire reinforcement between the 2 layers. Temperature range : -20° C, +120° C. Rolls length 10 m.

Article	Ø Inner mm.
2222080	80
2222100	102
2222101	110
2222102	120
2222106	152
2222120	180

**PVC hose**

with rigid PVC crash resistant reinforcement. Smooth inside, very light and flexible, weathering and most chemicals resistant, Ø mm. 70. Roll length mt. 50. Sold per mt.



2222670 Tube